

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2011-04-21

Technical Data

Material:




Contact Material: Brass
 Contact plating: Au or Sn Over 50 μ m Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: PBT/PA6T+30%G.F

Electrical:

Current rating: 3.0Amps/contact max.
 Contact resistance: $\leq 20\text{m}\Omega$ /contact
 Insulation resistance: $\geq 1000\text{M}\Omega$ at V=100V
 Withstanding Voltage: 1000V AC/minute

Mechanical:

Mechanical life cycle: min.200
 Operating temperature: -40°C to +105°C
 Soldering temperature: +255°C

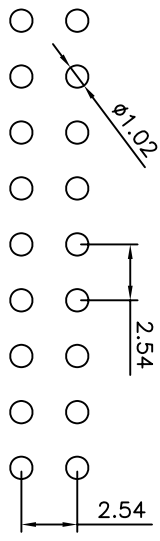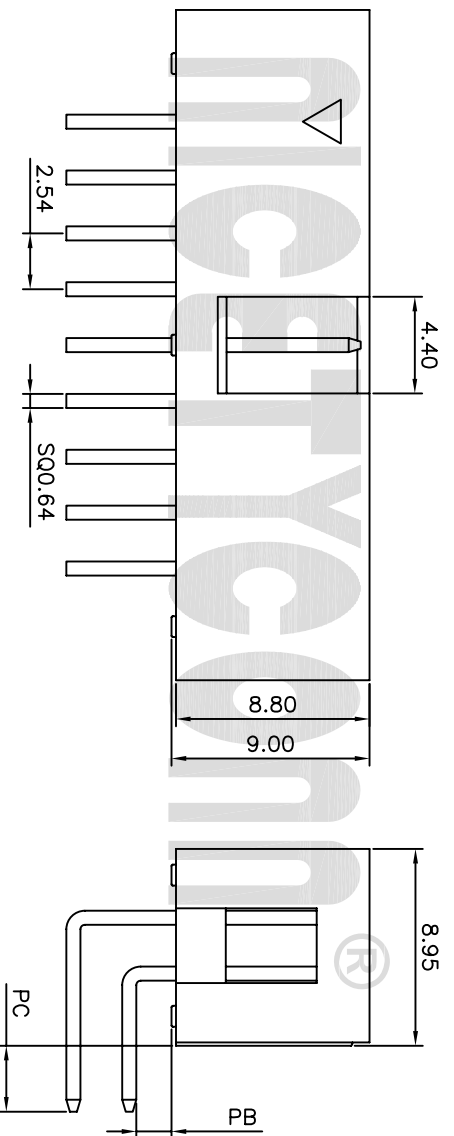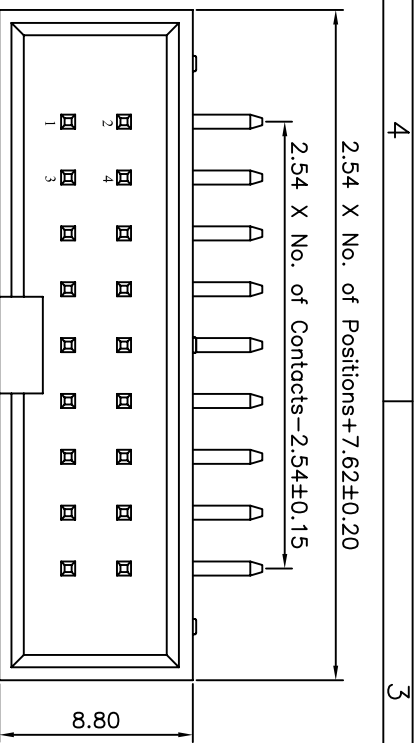

P.C.B LAYOUT

JN	1	XX	R	XX	X	N	XXX
----	---	----	---	----	---	---	-----

品名 JN=筒牛	间距 1=2.54	PIN位总数 06-64P	产品折弯类型 R=90度折弯	表面处理 SN=11120 μ MT=镀锡 GF=Gold Flash G1=Gold 1 μ " G2=Gold 2 μ " G3=Gold 3 μ " G4=Gold 5 μ " G5=Gold 8 μ " G6=Gold 10 μ " G7=Gold 15 μ " G8=Gold 30 μ " GA=Gold 1.5 μ " SO=半金锡	塑胶材质 A=PBT C=PA6T	塑胶特性 N=常规	针长
-------------	--------------	------------------	-------------------	--	-------------------------	--------------	----

Dimension antitheses list (尺寸选型表)		
Item (项目)	L	PB
Standard (尺寸)		
Remarks (备注)	以上尺寸可由客户选择	



深圳市创辉诚科技有限公司
 SHENZHEN CHUANGHUICHENG TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON	TITLE:	双排90度筒牛 PH2.54 系列图
ANGLE $\pm 5^\circ$	DATE: 2011-04-21	DRAWING NO.:	JN1RXXX001
X.XXX ± 0.10	DRAWN:	REV:	A0
X.XX ± 0.20	CHECKED:	UNIT:	mm
X.X ± 0.30	APPROVED:	SCALE:	3:1
X. ± 0.50		SIZE:	A4