

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2011-04-21

## Technical Data

### Material:




Contact Material: Brass  
 Contact plating: Au or Sn Over 50μ" Ni  
 Insulator Material: Black Polyester UL94V-0  
 Standard: PBT/PA6T+30%G.F

### Electrical:

Current rating: 3.0Amps/contact max.  
 Contact resistance: ≤20mΩ/contact  
 Insulation resistance: ≥1000MΩ at V=100V  
 Withstanding Voltage: 1000V AC/minute

### Mechanical:

Mechanical life cycle: min. 200  
 Operating temperature: -40°C to +105°C  
 Soldering temperature: +255°C

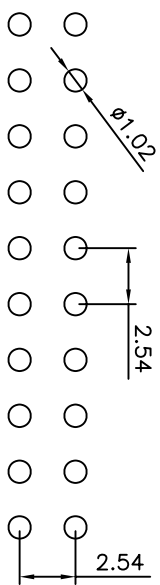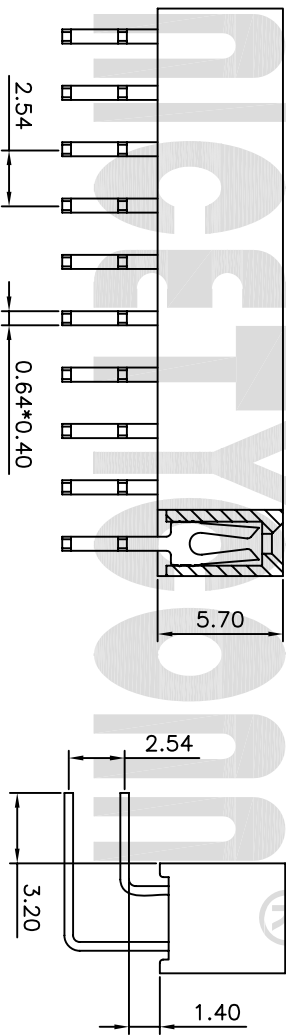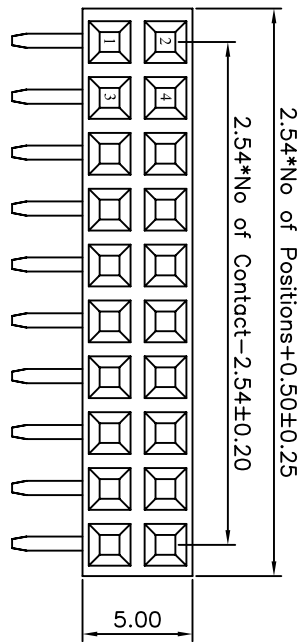

### P.C.B LAYOUT

PM	1	57	12	XXX	R	XX	X	N	Y	032
品名 PM=排母	间距 1=2.54	塑高 57=5.7mm	产品类型 12=单塑双排	PIN位总数 04-80P	产品折弯类型 R=90度折弯	表面处理 SN Tin100u" G1 Gold 1u" G2 Gold 2u" G3 Gold 3u" G4 Gold 5u" G5 Gold 8u" G6 Gold 10u" G7 Gold 15u" G8 Gold 30u"	塑胶材质 A=PBT C=PA6T	塑胶特性 N=常规	塑胶类型 Y=Y型	端子PC/脚宽

		<b>深圳市创辉诚科技有限公司</b> SHENZHEN CHUANHUICHENG TECHNOLOGY CO.,LTD	
TOLERANCE	PROJECTON	DATE	TITLE
ANGLE ±5°	2011-04-21	2011-04-21	双排折弯母座 PH2.54 塑高5.7 Y型 PC: 2
X:XXX ±0.10	DRAWN :		PART NO: PM15712XXXXXXNY032
X:XX ±0.20	CHECKED :		DRAWING NO: PM15712DY013
X:X ±0.30	APPROVED :		REV: A0
X: ±0.50			UNIT: mm
			SCALE: 3:1
			SIZE: A4