

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2011-06-21

Technical Data

Material:


Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over 50µ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: PA6T+30%G.F

Electrical:



Current rating: 3.0Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 1000V AC/minute

Mechanical:

Mechanical life cycle: min. 200
 Operating temperature: -40°C to +105°C
 Soldering temperature: +255°C

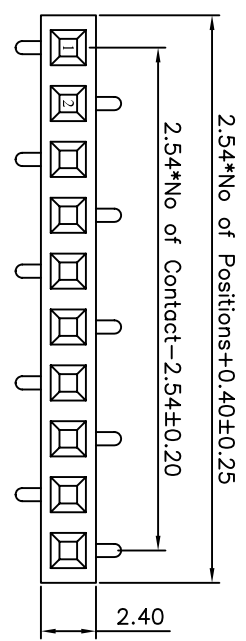

SMT A Type

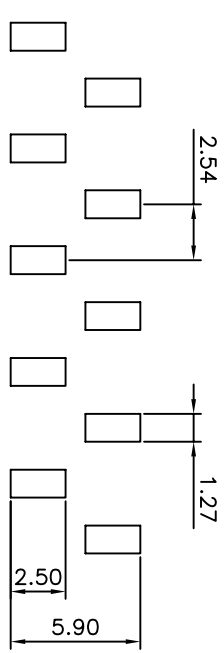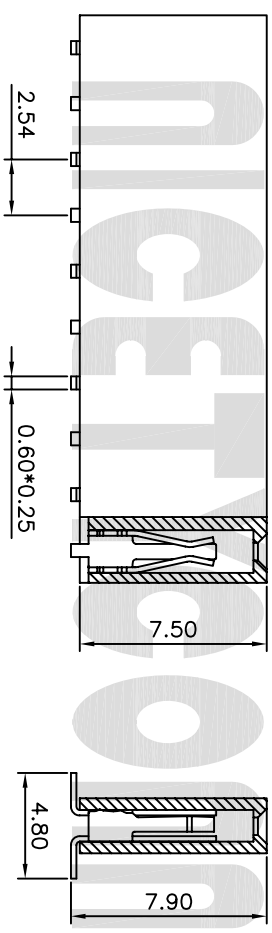

P.C.B LAYOUT

PM	1	75	11	XXX	A	XX	C	N	U	048
品名 PM=排母	间距 1=2.54	塑高 75=7.5mm	产品类型 11=单塑单排	PIN位总数 02-40P	产品封装类型 A=SMT第一P期 下	表面处理 SN Tin100µ" G1 Gold 1µ" G2 Gold 2µ" G3 Gold 3µ" G4 Gold 5µ" G5 Gold 8µ" G6 Gold 10µ" G7 Gold 15µ" G8 Gold 30µ"	塑胶材质 C=PA6T	塑胶特性 N=常规	塑胶类型 U=U型	端子PC/脚宽

		深圳市创辉诚科技有限公司 SHENZHEN CHUANGHUICHENG TECHNOLOGY CO.,LTD	
TOLERANCE	PROJECTON		TITLE:
ANGLE ±5°	DATE: 2011-06-21		单排贴片排母 A Type PH2.54 塑高7.5 U型
X.XXX ±0.10	DRAWN:		PART NO: PM117511XXXXXXCNCNU032
X.XX ±0.20	CHECKED:		DRAWING NO: PM117511AU042
X.X ±0.30	APPROVED:		REV: A0
X: ±0.50			UNIT: mm
			SCALE: 3:1
			SIZE: A4