

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2013-10-09

Technical Data

Material:

Contact Material: Brass
 Contact plating: Au or Sn Over 50 μ m Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: PBT/PA6T+30%G.F

Electrical:



Current rating: 3.0Amps/contact max.
 Contact resistance: \leq 20m Ω /contact
 Insulation resistance: \geq 1000M Ω at V=100V
 Withstanding Voltage: 1000V AC/minute

Mechanical:

Mechanical life cycle: min.200
 Operating temperature: -40°C to +105°C
 Soldering temperature: +255°C

包装方式: 袋装

Item (项目)	L	PA	PC	H1	H2
Standard (尺寸)					
Remarks (备注)	以上尺寸可由客户选择				

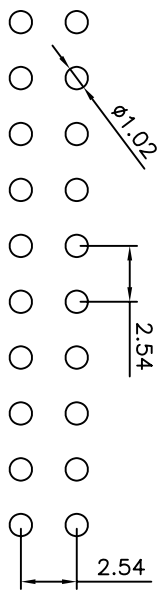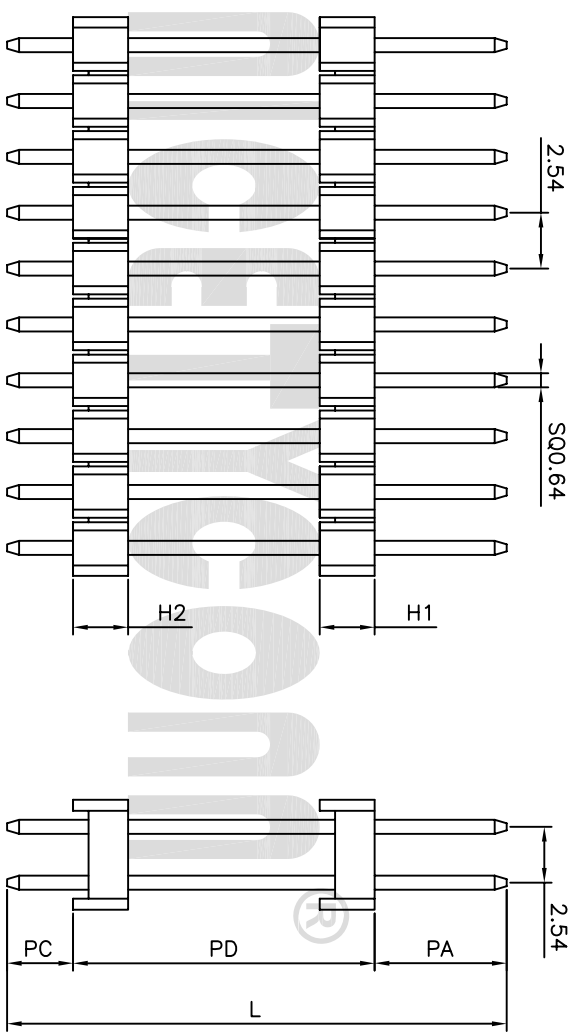

P.C.B LAYOUT

PZ	1	XX	22	XXX	D	XX	X	N	N	XXX
品名 PZ=排针	间距 1=2.54	规格 15=1.50mm 17=1.70mm 20=2.00mm 25=2.50mm	产品类型 22=双排双非	PIN位数量 04-80P	产品型号类型 D=直插	表面处理 SN=11120A OR=Gold Flash G1=Gold 10" G2=Gold 20" G3=Gold 30" G4=Gold 50" G5=Gold 80" G6=Gold 100" G7=Gold 150" G8=Gold 200" G9=Gold 300" S1=半漆锡	塑胶材质 A=PBT B=PA6 C=PA6T D=PA66 E=PA9T F=PCP	塑胶特性 N=常规	排针盖 N=无	针长 XXX= PA+PC+PD

NETTYCOM 深圳市创辉诚科技有限公司
 SHENZHEN CHUANGHUICHENG TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON	TITLE:
ANGLE \pm 5°	DATE: 2013-10-09	双排双塑180度排针 PH2.54 系列图
X:XXX \pm 0.10	DRAWN:	PART NO: PZ1XX22XXXDXNNNNXXXX
X:XX \pm 0.20	CHECKED:	DRAWING NO: PZ1XX22DXXX003
X:X \pm 0.30	APPROVED:	REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4