

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2011-04-21

Technical Data

Material:

Contact Material: Brass
 Contact plating: Au or Sn Over 50 μ m Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: PBT/PA6T+30%G.F




Electrical:

Current rating: 2.0Amps/contact max.
 Contact resistance: $\leq 20m\Omega$ /contact
 Insulation resistance: $\geq 1000M\Omega$ at V=100V
 Withstanding Voltage: 1000V AC/minute

Mechanical:

Mechanical life cycle: min. 200
 Operating temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C
 Soldering temperature: +255 $^{\circ}$ C

包装方式: 袋装

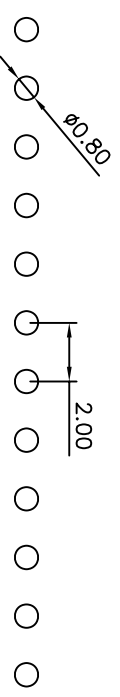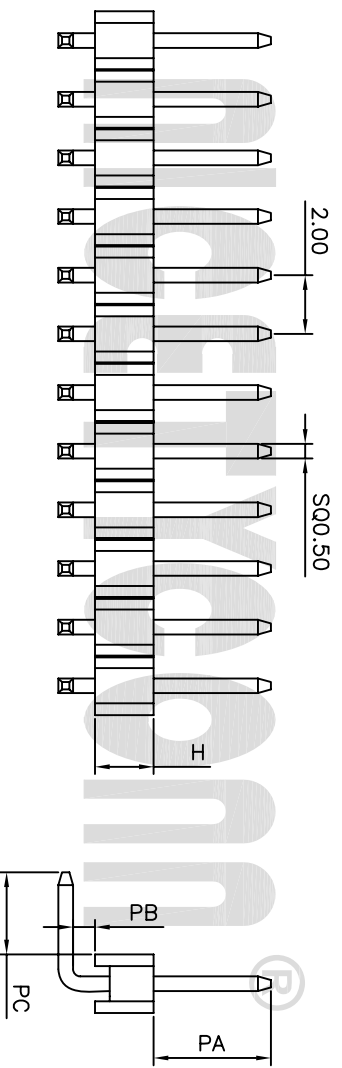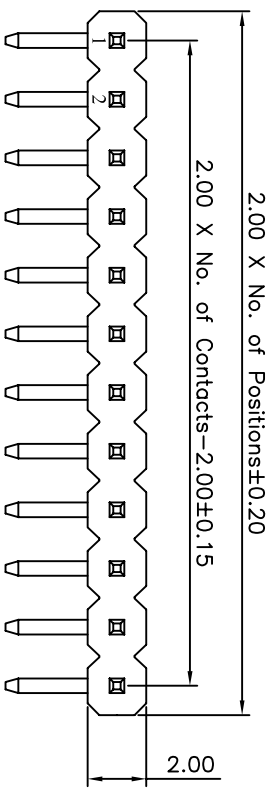

P.C.B LAYOUT

Dimension antitheses list (尺寸选型表)					
Item (项目)	L	PC	PA	PB	H
Standard (尺寸)					
Remarks (备注)	以上尺寸可由客户选择				

PZ	2	XX	11	XXX	R	XX	X	N	N	XXX
品名 PZ=排针	数量 2=2.00	塑高 10=1.00mm 15=1.50mm 20=2.00mm	产品类型 11=单塑单排	PIN位总数 01~40P	产品折弯类型 R=90度折弯	表面处理 SN=111120 Ni=镀锌 G1=镀Ni 10" G2=镀Ni 20" G3=镀Ni 30" G4=镀Ni 40" G5=镀Ni 80" G6=镀Ni 100" G7=镀Ni 150" G8=镀Ni 300" GAS=镀1.5u" SP=半全抛	塑胶材质 A=PBT B=PA6 C=PA6T D=PA6 E=PA6T F=PA6T G=PC	塑胶特性 N=常规	排针座 N=无	针长 1.0+PC+PB +++PA

NETTYCOM 深圳市创辉诚科技有限公司
 SHENZHEN CHUANGHUICHENG TECHNOLOGY CO.,LTD

TOLERANCE	ANGLE $\pm 5^{\circ}$
PROJECTON	DATE: 2011-04-21
DRAWN:	PART NO: PZ22XX11XXXXRXXXXXXX
CHECKED:	DRAWING NO: PZ22XX11RXXXX022
APPROVED:	REV: A0 UNIT: mm SCALE: 4:1 SIZE: A4

TITLE: 单排单塑90度折弯排针 PH2.00 系列图