


4

3

2

1

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2014-09-16



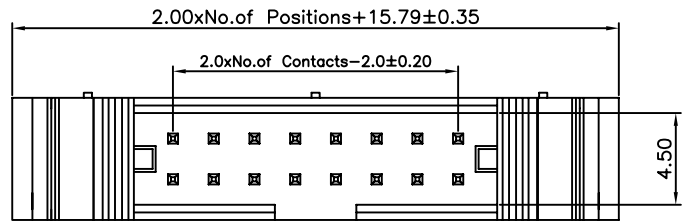


Technical Data

Material:
 Contact Material: Brass
 Contact plating: Au0.8u" or Sn Over 50μ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: PA6T+30%G.F

Electrical:
 Current rating: 2.0Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 1000V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperature: -40°C to +105°C
 Soldering temperature: +255°C

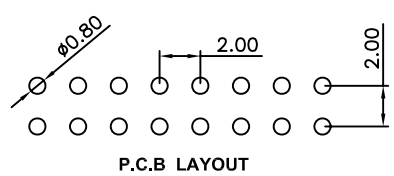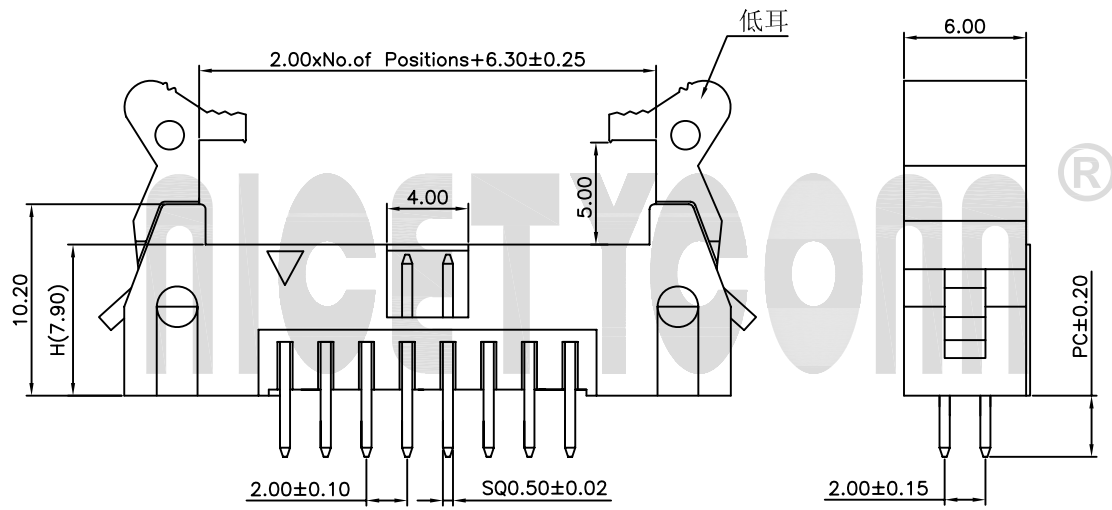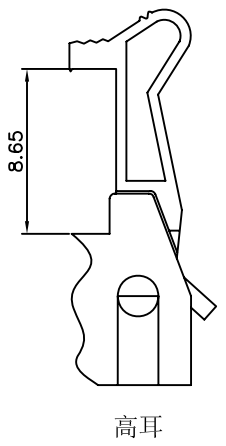

Item (项目)	L	PC
Standard (尺寸)		
Remarks (备注)	以上尺寸可由客户选择	

NJ	2	XX	D	XX	C	X	XXX
品名 NJ=牛角	间距 2=2.00	PIN位总数 06~50P	产品折弯类型 D=直插	表面处理 SN=Tin120u" MT=镀雾锡 GF=Gold Flash G1=Gold 1u" G2=Gold 2u" G3=Gold 3u" G4=Gold 5u" G5=Gold 8u" G6=Gold 10u" G7=Gold 15u" G8=Gold 30u" GA=Gold 1.5u" S0=半金锡	塑胶材质 C=PA6T	塑胶特性 G=高耳 D=低耳	针长

nicetyconn® 深圳市创辉诚科技有限公司
 SHENZHEN CHUANGHUICHENG TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON		TITLE:
ANGLE ±5°	DATE :	2014-09-16	双排180度牛角 PH2.0 系列图
X.XXX ±0.10	DRAWN :		PART NO: NJ2XXDXXCXXXX
X.XX ±0.20	CHECKED :		DRAWING NO: NJ2DXXX004
X.X ±0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 4:1 SIZE: A4
X. ±0.50			

4

3

2

1