

| REVISION DATA | | |
|---------------|-------------|------------|
| REV | DESCRIPTION | DATE |
| A0 | NEW DRAWING | 2011-04-21 |

Technical Data

Material:

Contact Material: Brass
 Contact plating: Au or Sn Over 50 μ m Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: PBT/PA6T+30%G.F


Electrical:

Current rating: 2.0Amps/contact max.
 Contact resistance: \leq 20m Ω /contact
 Insulation resistance: \geq 1000M Ω at V=100V
 Withstanding Voltage: 1000V AC/minute


Mechanical:

Mechanical life cycle: min.200
 Operating temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C
 Soldering temperature: +255 $^{\circ}$ C

包装方式: 袋装

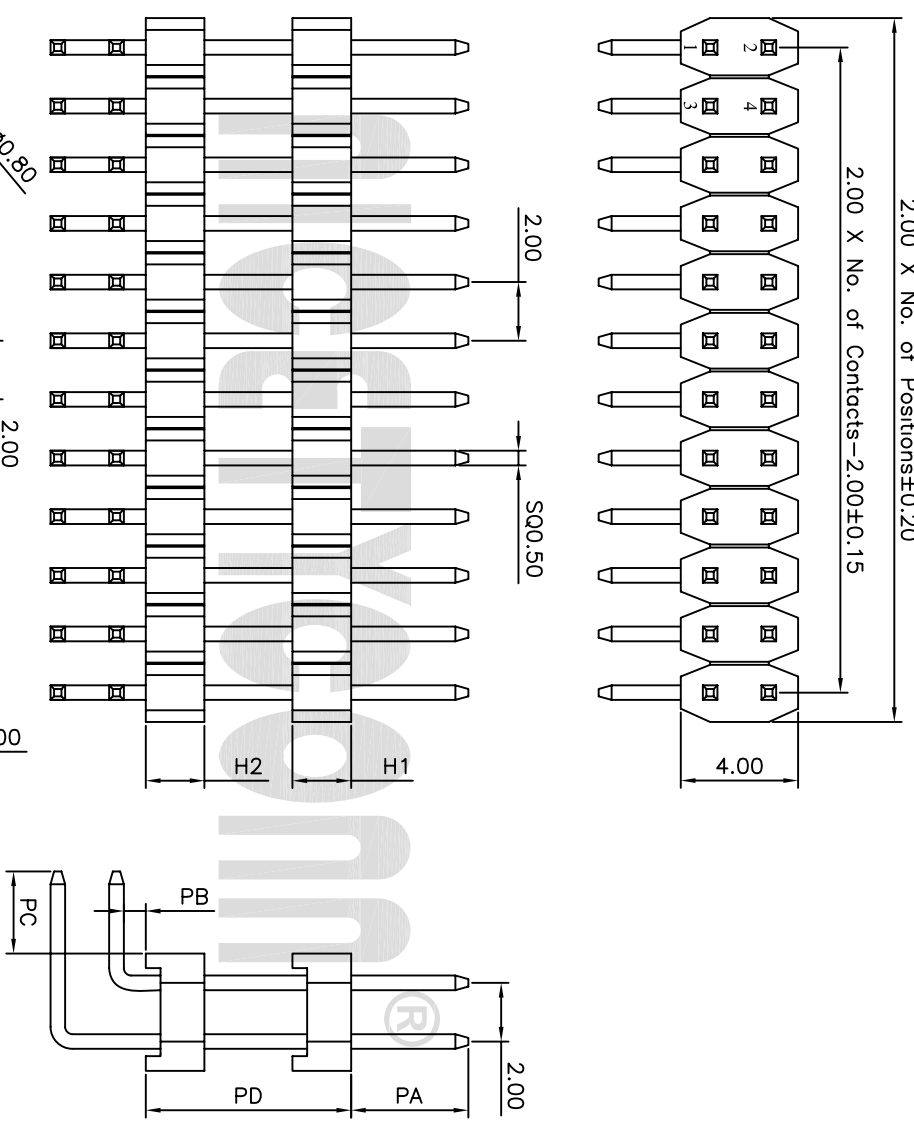

P.C.B LAYOUT

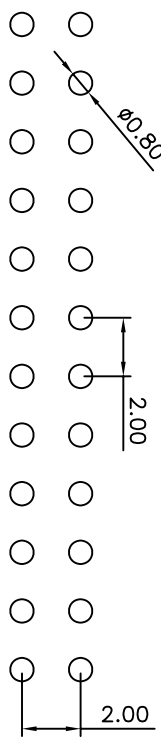

| | | | | | | | | | | |
|-------------|--------------|---|-----------------|------------------|-------------------|--|---|--------------|------------|--|
| PZ | 2 | XX | 22 | XXX | R | XX | X | N | N | XXX |
| 品名 PZ=排针 | 数量 2=2.00 | 规格 10=1.00mm 15=1.50mm 20=2.00mm | 产品类型 22=双塑双排 | PIN位数量 04=80P | 产品折弯类型 R=90度折弯 | 表面处理 SN=111120 OS=50/10 Flash G1=Cd/D1 Tu G2=Cd/D1 2r G3=Cd/D1 2r G4=Cd/D1 5r G5=Cd/D1 8r G6=Cd/D1 10r G7=Cd/D1 15r G8=Cd/D1 30r G9=Cd/D1 50r SN=半全抛 | 塑胶材质 A=BT B=PA6 C=PA6T D=PA66 E=PA9T F=PC | 塑胶特性 N=常规 | 排针座 N=无 | 针长 短针=1.0+PC+ D+PD+PA 长针=短针+4.0 |

| Dimension antitheses list (尺寸选型表) | | | | | | | |
|-----------------------------------|------------|-----|----|----|----|----|----|
| Item (项目) | L短针 | L长针 | PC | PA | PB | H1 | H2 |
| Standard (尺寸) | | | | | | | |
| Remarks (备注) | 以上尺寸可由客户选择 | | | | | | |

NETTYCOM 深圳市创辉诚科技有限公司
 SHENZHEN CHUANGHUICHENG TECHNOLOGY CO.,LTD

| | | | | | |
|-----------|---------------|-----------|------------|--------------|------------------------|
| TOLERANCE | ±5 $^{\circ}$ | PROJECTON | | TITLE: | 双排双塑90度折弯排针 PH2.00 系列图 |
| ANGLE | ±5 $^{\circ}$ | DATE: | 2011-04-21 | PART NO.: | PZ22XX22XXXXRXXXXXXX |
| X:XXX | ±0.10 | DRAWN: | | DRAWING NO.: | PZ22XX22RXXXX037 |
| X:XX | ±0.20 | CHECKED: | | REV: | A0 |
| X:X | ±0.30 | APPROVED: | | UNIT: | mm |
| X: | ±0.50 | | | SCALE: | 4:1 |
| | | | | SIZE: | A4 |