

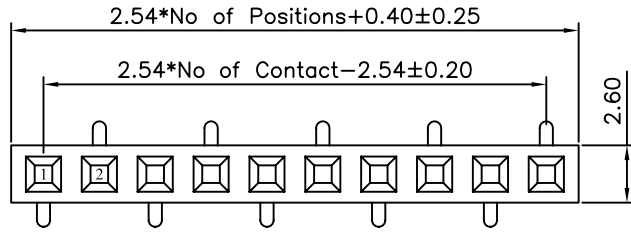


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2014-06-19

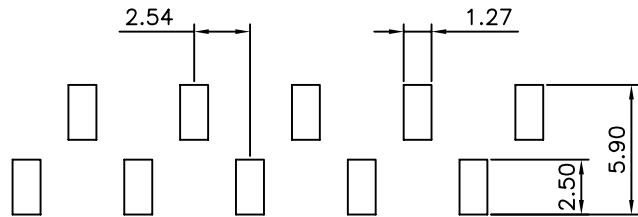

SMT A Type

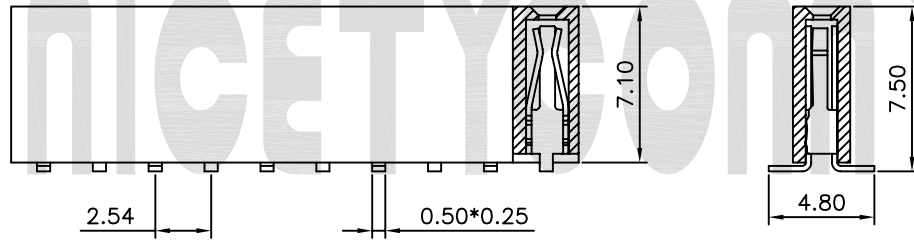

P.C.B LAYOUT

Technical Data

Material:

Contact Material: Phosphor Bronze
 Contact plating: Au1u" Over 50u" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: PA6T+30%G.F

Electrical:

Current rating: 3.0Amps/contact max.
 Contact resistance: $\leq 20m\Omega$ /contact
 Insulation resistance: $\geq 1000M\Omega$ at V=100V
 Withstanding Voltage: 1000V AC/minute

Mechanical:

Mechanical life cycle: min.200
 Operating temperature: -40°C to +105°C
 Soldering temperature: +255°C

PM	1	71	11	XXX	A	XX	X	N	U	048
P/N PM=Female Header	Pitch 1=2.54	H 71=7.1mm	Product Type 11=Single Housing single Row	Pins 02~40P	Right Angle Type A=SMT the IP down-direction	Surface Plating SN Tin100u" GF Gold Flash G1 Gold 1u" G2 Gold 2u" G3 Gold 3u" G4 Gold 5u" G5 Gold 8u" G6 Gold 10u" G7 Gold 15u" G8 Gold 30u"	Housing Material A=PBT C=PA6T	Housing Type N=Normal	Terminal Type U=U Type	Terminal PC/ PW

nicetyconn® SHENZHEN CHUANG HUI CHENG TECHNOLOGY CO., LTD.
 Tel: +86-755-27164749 Http://www.nicetyconn.com

TOLERANCE	PROJECTON		TITLE:
ANGLE ±5°	DATE :	2014-06-19	PH 2.54 Female Header U Type H 7.1 single Row SMT A
X.XXX ±0.10	DRAWN :		PART NO: PM17111XXXAXXXNU048
X.XX ±0.20	CHECKED :		DRAWING NO: PM17111AU018
X.X ±0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50			